

The VP-1241 power amplifier can be used for rack-mount application.








Article number:VP-1241 CE
Alternative products: VP-1061, VP-1121,
VP-1361

Specifications

Power source	230 V AC, 50 / 60 Hz
Rated output	240 W
Frequency response	80 Hz - 16 kHz (± 3 dB)
Distortion	< 1 %
Distortion	< 1 % (at 1 kHz, rated power)
Power consumption	537 W AC: (at rated output), 240 W (EN60065). 14.6 A DC: (at rated output), 0.4 A (no signal)
Current consumption	14,6 A
S/N ratio	80 dB (or more)
Inputs	2 program inputs (parallel): 0 dB, 20 k Ω , balanced 2 priority inputs (parallel): 0 dB, 20 k Ω , balanced
Outputs	Speaker output: 100 V (42 Ω)
Number of channels	1
Dimensions (W x H x D)	483,6 x 132,6 x 337,8 mm
Dimensions (ϕ x D)	x 337,8 mm
Finish	Aluminium, alumite process, black,
Operating humidity	90 % RH or less (condensation free)
Operating temperature	0°C to +40°C

Appearance

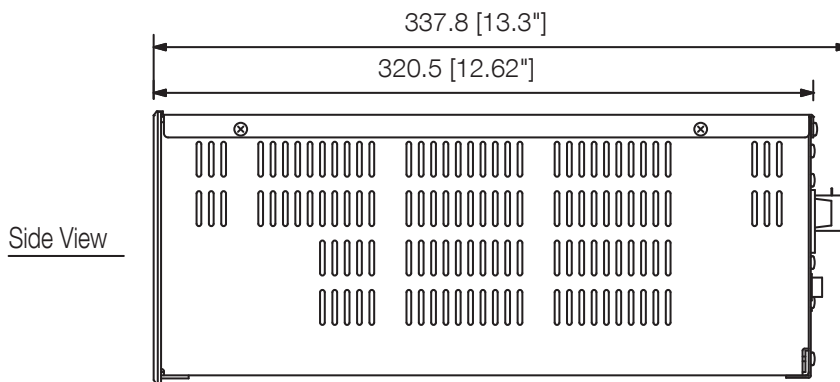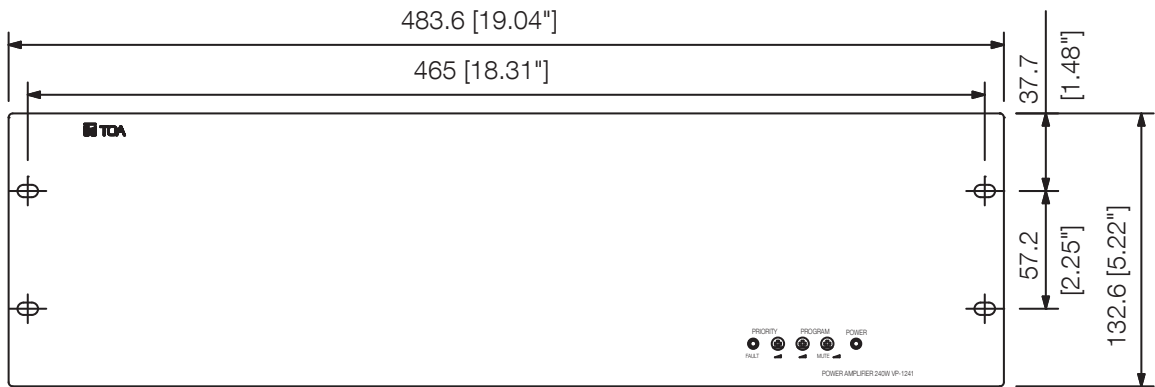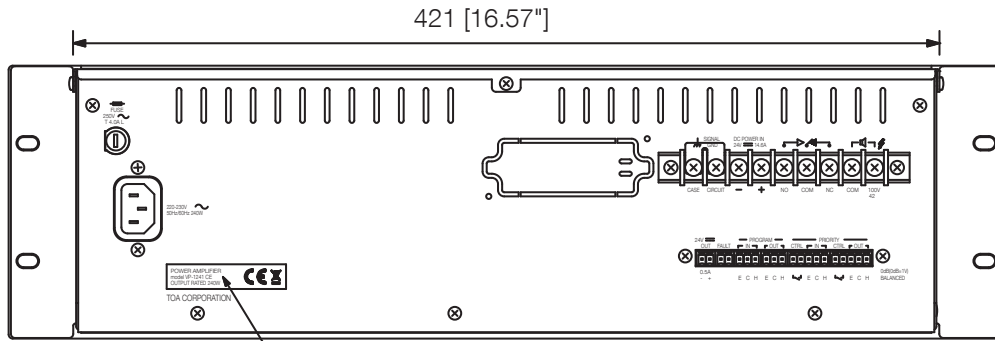

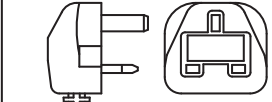MODEL	AC plug
CE	
CE-GB	

UNIT:mm SCALE:1/4